

KARAVAN






UTILITY



Some models shown with optional features

		SPECS		Lbs of Steel or Aluminum	Bed Length	OAL	Carrying Capacity	GVWR	Trailer Weight	Number of Axles		
Elite	2" x 6" Treated Plank	5.5x11	KTS-2990-66-11-DT	525	132"	180"	2200 lb	2990 lb	790 lb	1		
		7x18	KTPU-6500-TEB10-82-18-DT	1118	204"	252"	4780 lb	6500 lb	1720 lb	2		
Pro	2" x 6" Treated Plank	7x15	KTPU-6500-TEB10-82-15-SL	1018	180"	234"	4935 lb	6500 lb	1565 lb	2		
		7x15	KTPU-6500-TEB10-82-15-DT	1018	180"	234"	4935 lb	6500 lb	1565 lb	2		
		7x13	KPU-2990-82-13-DT	648	156"	204"	1962 lb	2990 lb	1048 lb	1		
		6x12	KPU-2990-72-12-DA (w/ J-Hook)	596	144"	192"	2007 lb	2990 lb	983 lb	1		
		6x12	KPU-2990-72-12-DA	595	144"	192"	2007 lb	2990 lb	983 lb	1		
		6x10	KPU-2990-72-10-DA (w/J-Hook)	579	120"	168"	2055 lb	2990 lb	935 lb	1		
		6x10	KPU-2990-72-10-DA	579	120"	168"	2055 lb	2990 lb	935 lb	1		
		5.5x11	KTS-2990-66-11-DT	525	132"	180"	2200 lb	2990 lb	790 lb	1		
		5x10	KPU-2990-60-10-DA	480	120"	168"	2245 lb	2990 lb	745 lb	1		
		Galvanize Mesh Insert	5/4" x 6" Treated	5x8	KPU-2000-60-8-HD	321	96"	143"	1448 lb	2000 lb	552 lb	1
5x8	KPU-2000-60-8-RR			321	96"	143"	1478 lb	2000 lb	522 lb	1		
5x8	KPU-2000-60-8-GM (Galv Mesh)			321	96"	143"	1478 lb	2000 lb	522 lb	1		
HD	2" x 6" Treated Plank	7x18	KTHU-6500-TEB10-82-18-DT	1118	204"	252"	4780 lb	6500 lb	1720 lb	2		
		7x15	KTHU-6500-TEB10-82-15-SL	1018	180"	234"	4935 lb	6500 lb	1565 lb	2		
		7x15	KTHU-6500-TEB10-82-15-DT	1018	180"	234"	4935 lb	6500 lb	1565 lb	2		
		7x13	KHU-2990-82-13-DT	648	156"	204"	1962 lb	2990 lb	1048 lb	1		
		6x12	KHU-2990-72-12-DA (w/ J-Hook)	596	144"	192"	2007 lb	2990 lb	983 lb	1		
		6x12	KHU-2990-72-12-DA	595	144"	192"	2007 lb	2990 lb	983 lb	1		
		6x10	KHU-2990-72-10-DA (w/J-Hook)	579	120"	168"	2055 lb	2990 lb	935 lb	1		
		6x10	KHU-2990-72-10-DA	579	120"	168"	2055 lb	2990 lb	935 lb	1		
		Galvanize Mesh Insert	5/4" x 6" Treated	5.5x11	KTS-2990-66-11-DT	525	132"	180"	2200 lb	2990 lb	790 lb	1
				5x10	KHU-2990-60-10-DA	480	120"	168"	2245 lb	2990 lb	745 lb	1
5x8	KHU-2000-60-8-HD			321	96"	143"	1448 lb	2000 lb	552 lb	1		
5x8	KHU-2000-60-8-RR			321	96"	143"	1478 lb	2000 lb	522 lb	1		
5x8	KHU-2000-60-8-GM (Galv Mesh)			321	96"	143"	1500 lb	2000 lb	500 lb	1		

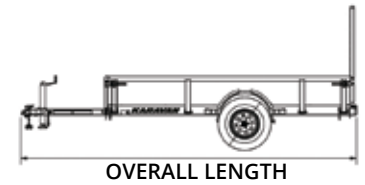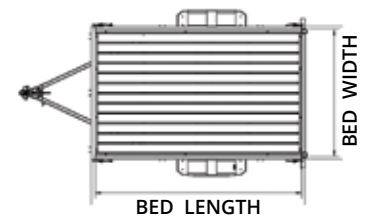

FEATURES

SwayControl™ Engineering
Welded tubular frame and A-frame tongue on most models

Durable and Attractive High Quality Finish
17-step powder coating; galvanized available on some models

Patented Fold-Down Rails
Makes side loading cargo easy

Patented Aluminum Modular Design
AL models are attractive, low profile, and easy to move

QuietTow™ Componentry
Tensioner latches and nylon bushings eliminate rattle and squeak

High Reliability ShortFree™ Lighting System
Fully grounded and all plug (no ScotchLoks); wiring is concealed

Sure-Lube Wheel Bearing Grease System
Allows quick and clean greasing for easy maintenance

Coated Self-Coiling Safety Cables
Cables coil out of the way when not in use